


Lanai™ Owners Manual

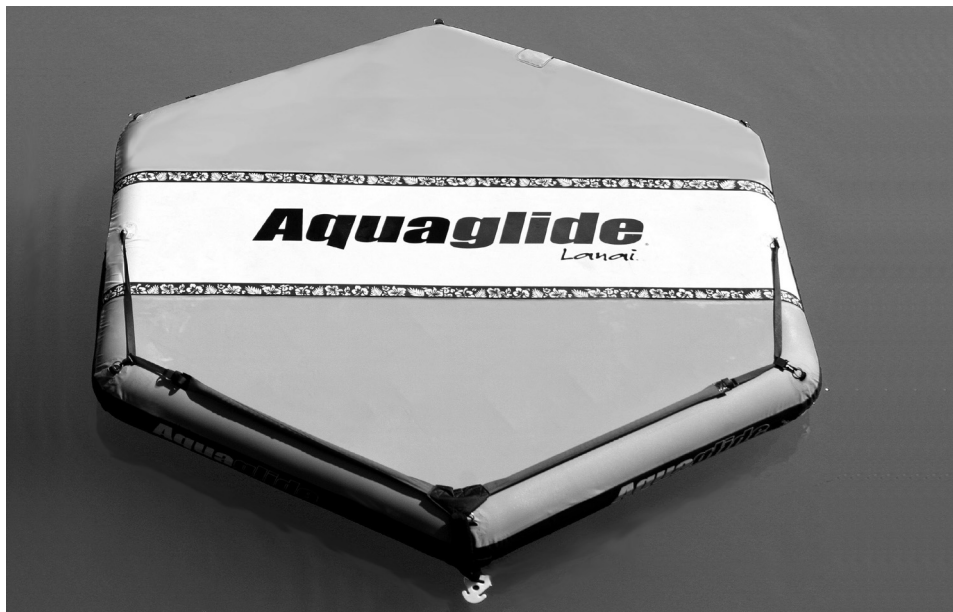

The Aquaglide Lanai combines the performance of a towable with the convenience of a portable raft. The Lanai comes with a patent pending 3 point Tow Control strap that allows the riders to stand, kneel, or sit while towing. The Lanai allows 6 riders while towing and 10 or more as raft.

Maximum Boat Speed: 18mph(29km/h)

Maximum Number of Riders while towing: 6

Tow Line: Minimum 6100lb breaking strength

ASSEMBLY INSTRUCTIONS

- 1) Lay the Aquaglide out on a flat surface without sharp objects that could puncture the skin. If the Aquaglide has an outer cover, make sure the inside PVC bladder is unfolded and the valves are in the correct position.
- 2) Inflate the Aquaglide to about 50% full. If your Aquaglide has a cover recheck to make sure it is correctly aligned with the PVC bladder. If there is more than one chamber in the bladder, inflate the outer chamber first. After the cover is aligned with the PVC bladder inflate the chambers to 100% starting with the outer chamber first.

DO NOT DRAG the Aquaglide into the water. Carry the Aquaglide to avoid wear on the cover and possible punctures. To anchor the Aquaglide, always use the webbing tow strap on the corner of the Aquaglide or in the case of the Aloha the Stainless Ring on the bottom.

TOWING INSTRUCTIONS

- 1) To tow the Aquaglide, always use a proper towing line designed for towing inflatables. Improper towing lines can break and cause personal injury. Attach the proper tow line ONLY to the "Quick Connect" fastener.
- 2) Always sit behind the straps when towing and always sit in the center or behind the center area of the Aquaglide. Sitting too far forward can cause the nose of the Aquaglide to dive underwater.
- 3) Be responsible when towing! Do NOT tow the Aquaglide at speeds faster than the recommended speed. Do NOT tow the Aquaglide with more than recommended number of people at a time. Always make sure that ALL users wear approved personal flotation devices when using the Aquaglide.

STORAGE

When taking the Aquaglide out of the water, pull it out using the front towing strap so the water is able to drain out of the mesh drains in the back. Allow the Aquaglide completely dry to prevent mildew. If using in salt water, rinse the Aquaglide with fresh water before storing. Release all the air from the chamber(s), and fold the Aquaglide. It's best to store the Aquaglide inside a warm area during the winter. Do not expose to freezing temperatures, as it can damage the material and cracks can occur in the PVC bladder.

SAFETY FIRST!

It is the owner's responsibility to carefully read the Owner's Manual and instruct all users in the safe operation of this product. The Aquaglide is intended for fun recreational use. However, use of this product and participation in the sport involves risk of personal injury or death. This risk can be reduced when the following guidelines are observed: All Maritime Law applies while operating the Aquaglide product as well as all local and federal laws.

Warnings!

- 1) **Do NOT use at speeds that exceed skills of the rider.**
- 2) **Aquaglide products should not be used by children except under adult supervision.**
- 3) **This is not a personal flotation device. Always wear a coast guard approved Type 111 (PFD) vest.**
- 4) **Never place wrists or feet through the handles or towing harness. Make sure that the tow rope is clear of all body parts prior or during use.**
- 5) **The watercraft driver is responsible for the user's safety and ride since the tube can not be controlled by the rider. Always have a person other than the driver observe the rider.**
- 6) **The watercraft driver should avoid excessive speed or sharp turns which might cause the Aquaglide product to flip over resulting in serious injury to the rider.**
- 7) **Do not tow in shallow water or near shore, docks, pilings, swimmers or other boats.**
- 8) **Do not exceed the maximum number of riders or the maximum boat speed.**
- 9) **The tow rope should be at least 50ft (15m) long but should not exceed 60ft (18m) long.**
- 10) **Do not operate watercraft or ride under the influence of alcohol or drugs.**
- 11) **Always be aware of other watercraft and swimmers.**

Release of Liability, Claim Waiver and Assumption of Risk Agreement

By opening and assembling this product, you are agreeing (1) to be bound to the terms set forth below; and (2) to require anyone using your Aquaglide to be bound by such terms. If you are unwilling to be bound by these terms, return this product (before use) for a full refund.

ASSUMPTION OF RISK: Use of the Aquaglide and any of its components involves certain inherent risks, dangers and hazards which can result in serious personal injury and death. In using the Aquaglide you freely agree to assume and accept any and all known and unknown risks of injury while using this equipment. The risks inherent in the sport can be greatly reduced by abiding by the Warning Guidelines listed in this Owner's Manual and by using common sense.

RELEASE AND WAIVER OF CLAIMS AGREEMENT: In consideration of the sale of the Aquaglide to you, you hereby agree to the fullest extent permitted by law, as follows:

TO WAIVE ANY AND ALL CLAIMS that you have or may in the future have against Aquaglide, Inc., North Sports Inc., its distributors and dealers resulting from use of the Aquaglide and any of its components.

TO RELEASE North Sports, Inc. and Aquaglide, Inc. from any and all liability for any loss, damage, injury or expense that you or any users of your Aquaglide may suffer, or that your next of kin may suffer, as a result of the use of the Aquaglide, due to any cause whatsoever, including negligence or breach of contract on the part of North Sports in the design or manufacture of the Aquaglide and any of its components.

ARBITRATION: In further consideration of the sale to you of the Aquaglide and any of its components, you hereby agree to submit to binding arbitration any and all claims which you believe you may have against North Sports arising from the use of any of the Aquaglide equipment. The arbitration shall be pursuant to the rules of the American Arbitration Association. Arbitration shall be commenced within (1) year from the date on which any alleged claim first arose. Further, the arbitration shall be held in White Salmon, Washington unless otherwise mutually agreed to by all parties. The submission to the American Arbitration Association shall be unlimited and the arbitration award may be enforced by any Court of competent jurisdiction.

BINDING EFFECT OF AGREEMENT: In the event of your death or incapacity, this Agreement shall be effective and binding upon your heirs, next of kin, executors, administrators, assigns and representatives.

ENTIRE AGREEMENT: In entering into this Agreement, you are not relying upon any oral or written representations other than what is set forth in this agreement and the Aquaglide Owner's Manual.

www.aquaglide.net

PVC Repair Guide

The Aquaglide bladder is constructed of high quality PVC, and is designed to last for years. Every hull is inflated at the factory and tested for 12 hours before shipping to insure reliability. PVC is not puncture proof, and leaks can occur. Many times leaks in the hull are caused by the valves not being tightly secured. Always test this before assuming a repair is necessary. Many leaks are caused by dragging the hull across a sharp object that puts a very small puncture hole in the bladder, causing a slow leak. The PVC bladder can split along a seam if it is abused or towed at excessive speeds. PVC is easily repaired in almost any area, even seams.

You can either use a patch method, or fill small holes with Aquaseal. The Aquaglide comes with a small repair kit that is sufficient to fix most small punctures. You can also purchase an Aquaseal repair kit that contains Aquaseal, Co-Tol cleaner and accelerator, PVC patch and instructions. This kit is better for large repairs. For faster repairs, you can use a high quality Superglue and the PVC patch.

Materials and Tools Needed

- * Aquaglide repair kit or AquaSeal
- * A sponge and Soapy water
- * Paper towels
- * A small square of 220-grit sandpaper or similar
- * Scissors
- * Duct tape
- * A piece of the vinyl repair material large enough to extend at least 1.2 cm (1 inch) to either side and beyond each end of the hole or tear

** If your Aquaglide product has fabric cover you must first remove the PVC bladder follow step #1 if your product does not have a fabric cover then go to step #2

1. REMOVE THE PVC BLADDER - Open the zipper along the bottom of the cover. Starting at the opposite end of the cover from the zipper opening. Pick up the cover (with two people if possible) and slide the bladder to the zipper end by gently shaking the cover, so that the bladder slides to the other end, or fold the bladder over itself until it can be removed through the zipper. Remove the PVC bladder from the outer cover.

2. LOCATE THE PROBLEM - Inflate the PVC bladder and listen for the leak. If you do not hear the leak, wipe down suspect areas liberally - the entire bladder if necessary - with a sponge soaked in soapy water. The location of the leak will become apparent when the air exiting the PVC bladder makes the soapy water bubble. (Remember, sometimes there might be more than one hole, so make sure you do a thorough inspection) Dry the area around the hole, taking care not to lose its location. Mark a 4-cm (about 1.5-inch) diameter circle around the hole with a felt tip pen, and make a dot on the hole itself.

3. PREPARE THE SURFACE AREA - Deflate the Aquaglide. Place the Aquaglide in your work area so that the area to be repaired is unwrinkled and horizontal. **IMPORTANT! IN ORDER TO MAKE A RELIABLE REPAIR, YOU MUST PREPARE THE SURFACE CORRECTLY OR THE PATCH COULD FAIL.** PVC products have an oily residue that can affect the adhesion of glue to the surface. You need to remove this oil and any

dirt with sandpaper and solvent. Using 220-grit sandpaper, lightly sand the area 1 inch around the hole or tear. Blow away dust. Clean the area to be repaired with a solvent such as acetone or Cotel-240 solvent and let dry. Make sure the surface area is properly prepared. Do not touch this area with your fingers; any oil from your finger may cause the patch to fail.

FOR SMALL HOLES - Using the scissors, cut the piece of vinyl repair material into a circle about 2.5 cm (1 inch) in diameter) and lightly sand one side of this patch with the sandpaper and clean with solvent.

FOR LARGE REPAIRS OR TEARS - Cut a piece of Duct tape and place inside the hull with the sticky side up, folding the edges of the tear onto the tape so that the boat retains its original shape and that the edges of the tear are unwrinkled, horizontal and adjacent each other. Using scissors cut the piece of vinyl repair material into a shape that will extend at least 2.5 cm (1 inch) to either side and beyond each end of the tear and lightly sand one side of this patch with the sandpaper, and clean with solvent.

4. APPLY THE PATCH & GLUE - Use the glue from the supplied repair kit, or other glues designed for PVC to make the repair. Make sure to follow the instructions on the glue. There are several types of glue, Aquaseal requires several hours to fully dry, most contact glues require that you allow them to dry BEFORE you apply the patch. Carefully read and follow the instructions on the glue you are using.

5. DRY - Allow repair to dry in level position according to the glue instructions. Inflate the bladder to 25%-50% and leave overnight to insure that the repair is sound and all holes have been patched.

6. REPLACE THE BLADDER - Roll up the Bladder lengthwise so that the valves will align with the valve openings and insert the bladder back inside the cover.

Proper Inflation

It is extremely important to properly inflate your Aquaglide product. If the tube is under inflated the tube is dragged through the water instead of skimming on the surface of the water. Under inflating also causes stress to the tube, boat, and the tow rope. If the tube is over inflated it will increase pressure on the tube and will eventually lead to tube failure.

1. Aquaglide tube should be firm to the touch
2. An adult standing on the Aquaglide should only sink down a couple of inches.
3. If the Aquaglide tube has a cover, the cover should be wrinkle free and tight.

Air Pressure

Aquaglide tubes DO NOT require a lot of air pressure. The typical air pressure for an Aquaglide tube is 2 psi. The 12v Pump used to inflate bicycle tires or car tires does not work well for tubes. This type of pump can not handle the volume of air required to properly inflate a tube. Aquaglide offers, foot pumps, 12 volt, 110 volt and a Euro 220v pumps. For more pump information visit the Aquaglide website, www.aquaglide.net. A good pump specifically designed for tubes is extremely important.




Lightly Sand Area



Clean Area



Apply Glue to Hole Area and Patch

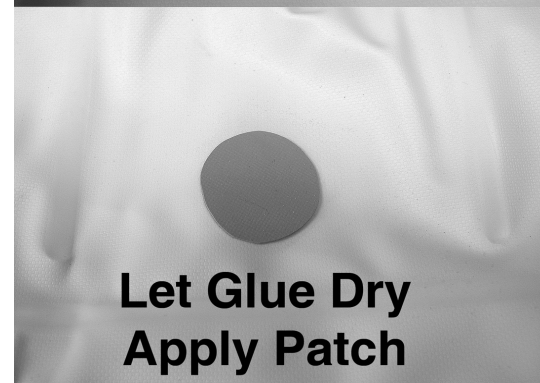

Let Glue Dry Apply Patch

Warranty

North Sports warrants the Airport to be free of defects in material or workmanship to the original purchaser for a period of 90 days from date of purchase. This warranty is subject to the following limitations:

1. The warranty is valid only when the warranty card is properly filled out online at www.aquaglide.net within (30) days from date of purchase.

2. The warranty is valid only when the Aquaglide product is used for normal recreational activities, and does not cover use in schools or rental operations.

3. North Sports will make the final warranty determination which may require inspection and/or photos of the equipment which clearly show defect(s). We require the above must be sent to North Sports postage prepaid or by email. Product can be returned only if a return authorization number (RA) is given by North Sports in advance. The RA number must be on the outside of the package or it will not be accepted at our warehouse. Upon receipt, North Sports will perform its responsibilities within (30) days.

4. If a product is deemed to be defective by North Sports, the warranty covers the repair or replacement of the defective product only. North Sports will not be responsible for any costs, losses or damages incurred as a result of loss of use of product.

5. This warranty does not cover damage caused by misuse, abuse, neglect or normal wear and tear including, but not limited to, punctures, dragging the product over the ground, damage due to excessive sun exposure or seam failure due to over inflation in the sun, damage caused by improper handling and storage, damage caused by use in waves or shorebreak and damage caused by anything other than defects in materials and workmanship.

6. This warranty is voided if any unauthorized repair, change or modification has been made to any part of the equipment. Authorization for such must come in writing from North Sports.

7. The warranty for any repaired or replacement equipment is good from the date of the original purchase only.

8. Any warranty claims must be accompanied by the original purchase receipt. The name of the retailer and date of purchase must be clear and legible.

9. There are no warranties which extend beyond the warranty specified here.

Register online:
www.aquaglide.net